


LS-DL-A27



Reliable technical data

Input voltage:100-240VAC 50-60Hz
 Output Current:350-700mA
 Light source:LED
 Power:7×1W/7×3W
 Color: WWW/CWWY/R/B/G
 Beam Angle:8° 15° 30° 45° 60°
 Operation Temperature:-20° -+50°
 Fixture Material: Aluminium
 Life Span: 50000Hours
 Surface Color: Silver/Brass/Shining White/Matt White
 Lamp Head can be adjusted ±30° ,With reflector

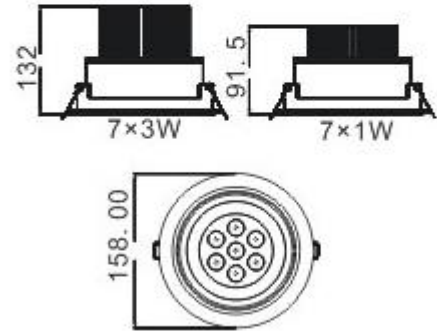

7*1W	Edison\Helio CW	560LM
7*1W	Edison\Helio WW	490LM
7*3W	Edison\Helio CW	840LM
7*3W	Edison\Helio WW	700LM
7*3W/P3	LED: CREE/ ww	840LM
7*3W/P4 Q2	LED: CREE/ cw	910LM


● Glass ● 143mm

LS-DL-A28



Reliable technical data

Input voltage:100-240VAC 50-60Hz
 Output Current:350-700mA
 Light source:LED
 Power:8×1W/8×3W
 Color: WWW/CWWY/R/B/G
 Beam Angle:8° 15° 30° 45° 60°
 Operation Temperature:-20° -+50°
 Fixture Material: Aluminium
 Life Span: 50000Hours
 Surface Color: Silver/Brass/Shining White/Matt White
 Lamp Head can be adjusted ±30°

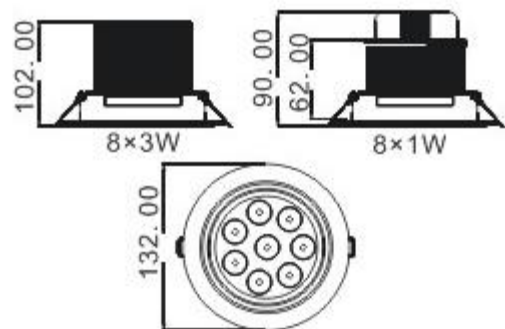

8*1W	Edison\Helio CW	640LM
8*1W	Edison\Helio WW	560LM
8*3W	Edison\Helio CW	960LM
8*3W	Edison\Helio WW	800LM
8*3W/P3	LED: CREE/ ww	960LM
8*3W/P4 Q2	LED: CREE/ cw	1040LM

● Glass ● 118mm